

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 March 2001 (15.03.2001)


PCT

(10) International Publication Number  
**WO 01/17595 A1**

- (51) International Patent Classification?: **A61M 15/00** (74) Agent: **HARRISON GODDARD FOOTE**; Tower House, Merriam Way, Leeds LS2 8PA (GB).
- (21) International Application Number: **PCT/GB00/03377**
- (22) International Filing Date:  
4 September 2000 (04.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9920839.9 4 September 1999 (04.09.1999) GB
- (71) Applicant (for all designated States except US): **INNOVATA BIOMED LIMITED** [GB/GB]; The Ziggurat, Grosvenor Road, St. Albans AL1 3HW (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BRAITHWAITE**, Philip [GB/GB]; ML Laboratories Plc, 13 Alexandra Way, Ashchurch Industrial Estate, Tewkesbury GL20 8NB (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.

[Continued on next page]

(54) Title: **DELIVERY DEVICE**

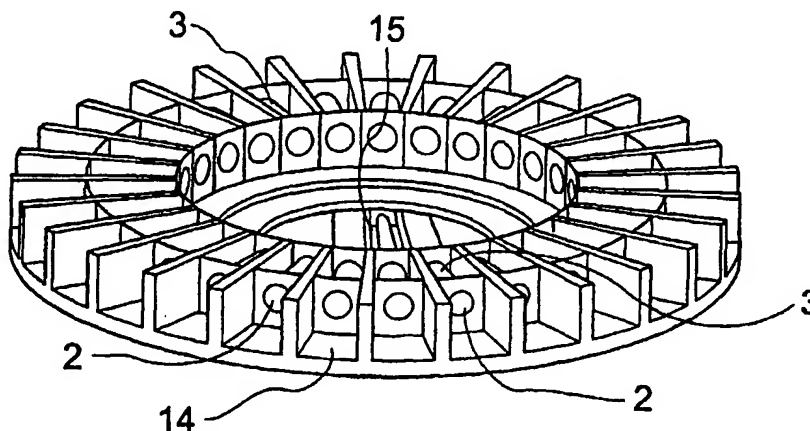

(57) Abstract: A delivery device, e.g. an inhaler, comprises a rotatable metering member adapted to dispense a measured amount of material, a material delivery passage and a material delivery orifice and at least one actuator member adapted to move the metering member from a material retaining position to a material dispensing position. In a magazine comprising a plurality of metering members, the actuator and metering members may operate in a radial direction. A plurality of rotatable magazines may be utilised in the delivery device. The delivery device may be used to deliver a single or a combination therapy.

BEST AVAILABLE COPY

WO 01/17595 A1



— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DELIVERY DEVICE

This invention relates to a novel form of material delivery device, for example, a medicament delivery device, such as an inhaler. In particular the invention provides  
5 a novel form of dry powder inhaler and a method of delivering a medicament.

Dry powder inhalers are known, such as TECHNOHALER, being developed by Innovata Biomed in the UK. Such a device is described in International Patent Application No WO 93/16748 (PCT/GB93/00335). WO '748 describes an inhaler  
10 which comprises a disc like magazine having a plurality of medicament carrying receptacles around its periphery. Each receptacle comprises a spool housed in a spool carrier. Each spool has a flange at each end which form a tight slidable fit within the body of the spool carrier. The space left between the body of the spool and the spool carrier is filled with an appropriate medicament.

15

The known TECHNOHALER is provided with suitable indexing means, including a push button and a ratchet mechanism which engages with the upper surface of the disc. Depression of the push button urges a push rod to push the spool, which is adjacent the inhalation passage of the inhaler, downwards and almost fully out of the  
20 spool carrier, and into the inhalation passage. As the spool is pushed into the inhalation passage, it carries with it the measured quantity of medicament which it has been used to contain inside the magazine. The user can then inhale through the mouthpiece so as to take up the drug now released into the inhalation passage. The upper flange of the spool remains, however, held by the lower part of the receptacle.

25 When the user then releases push button, the ratchet mechanism causes the disc to rotate by one step so that the next receptacle is brought into register with the inhalation passage. The inhaler is thus reset and ready for delivery of another dose of drug. The "empty" spool not having been pushed fully out of the first receptacle, continues to move round with the first receptacle, supported by the lower guide.

30

In the inhaler of the prior art whilst the spool magazine lies essentially in the same plane as the as the mouthpiece of the inhaler, the push rod acts on a spool in a perpendicular plane.

5 We have now found a novel form of medicament delivery device in which a push rod lies in essentially the same plane as the delivery orifice of the device and actuates the spool in a direction which is coaxial with the delivery orifice of the device. Thus when a plurality of spools are arranged radially in a magazine, such that the longitudinal axis of the spools lie in the same plane as the magazine and the spool  
10 may be expressed radially from the magazine. This has the advantage that, *inter alia*, a significantly slimmer device may be produced. Furthermore, the radial expression of the spools means that more than one magazine can be placed in the device and thus, *inter alia*, the device may deliver higher dosages, combination therapies and/or provide medication over a longer period of time.

15 Thus, according to the invention we provide a delivery device comprising a rotatable metering member adapted to dispense a measured amount of material, a material delivery passage and a material delivery orifice, and at least one actuator member adapted to move the metering member from a material retaining position to a  
20 material dispensing position characterised in that the actuator member moves in a substantially radial direction and actuates the metering member in a substantially radial direction.

The device of the invention has utility in a variety of areas, including, for example,  
25 medicament delivery. Thus, it is especially suited as an inhaler and especially a dry power inhaler (DPI).

According to a preferred feature of the invention the device is provided with a plurality of metering members housed in a magazine, preferably a substantially  
30 circular magazine. In an especially preferred embodiment a plurality of magazines may be loaded into the delivery device of the invention, e.g. a pair of magazines.

When the metering member is in the medicament retaining position it is preferably out of communication with the inhalation passage and whilst the metering member is in the medicament dispensing position it is preferably in communication with the inhalation passage.

5

The metering member is of such dimensions as to be able to pass into the inhalation passage. The metering member may comprise those described in WO 93/16748. Thus, in one embodiment the metering member may comprise a spool housed in a spool carrier. The spool carrier acts as a conduit for the spool to communicate with the inhalation passage. Thus the spool will be provided with a flange at each end such that the flanges are in sealing engagement with the inner walls of the conduit and a space exists between the inner walls of the conduit and the non-flanged portion of the spool. In the filled metering member, the space is taken up by a measured dosage of medicament. Indeed, the plug, flanges and conduit are so dimensioned so as to predetermine the amount of medicament available. In an alternative embodiment of the invention the metering member may comprise a medicament container with a closed end and an open end, a cap adapted to abut the open end of the container and a sleeve adapted to overlap the open end of the container and the cap. Reference hereinafter to a spool and spool carrier is intended to encompass a capped cartridge as hereinbefore described.

20

The spool and spool carrier is generally that described in the prior art patent application. However, instead of the spool being mounted in a vertical position each spool is essentially horizontally mounted. For the sake of clarity, the spools are positioned in the same plane as the plane of the disc magazine. The push rod used to eject the spool from the spool carrier therefore operates radially from the centre of the disc and does not push the spool out of the disc plane.

25

The actuator member may comprise a push rod mechanism which may be substantially similar to that known conventionally save that it acts radially.

30

Alternatively, when a plurality of magazines is used the actuator member may, for example, comprise a pair of push rods.

As hereinbefore described a significant advantage of the device of the invention is  
5 that it can be used to deliver combination therapies if desirable.

Increasingly, patients are required to take more than one medicine and this is no less the case in the treatment of bronchial disorders. Thus, for example, combination therapies such as a steroid with a  $\beta_2$  agonist, eg fluticasone and salmeterol, have been  
10 commercially successful. To date, the administration of such combination therapies comprises the use of a predetermined formulation either as a dry powder, eg in a gelatine capsule or a foil blister; or alternatively as a metered dose aerosol. However, this approach suffers from the disadvantage, inter alia, that the medical practitioner is restricted in that it is not possible to vary the quantities of the two  
15 medicaments administered. Thus, there has therefore been a long felt need for a dry powder inhalation system which permits the administration of combination therapies.

It is within the scope of this invention for more than two medicaments to be administered, however, it is considered most likely that dual combination therapies  
20 would be preferred by the medical profession. Thus the description hereinafter will generally refer to an inhaler adapted to administer a dual combination medicament, but it would be well understood by one skilled in the art that these references could be construed to multiple combinations.

25 Thus according to a further feature of the invention we provide a dry powder inhaler as hereinbefore described characterised in that the inhaler is adapted to take a plurality of disc magazines. The medicament encapsulated in the spool carriers of the two disc magazines may be the same or different. In one embodiment the medicaments are different and thus the inhaler is used to deliver a combination  
30 therapy. Alternatively, the medicament encapsulated by the spool carrier may itself be a combination therapy.

In a further embodiment of the invention a medicament delivery device, eg an inhaler, comprises a pair of disc magazines. Such a device may preferentially be provided with means for engaging a first magazine whilst disengaging a second magazine and which is moveable from an engaging to a disengaging position and  
5 vice-versa.

Such means may comprise male and female interlocking members. Preferentially, the disc magazine is provided with a female member and a drive means is provided with a male member.

10

In an especially preferred embodiment a drive plate is provided with a male member and is adapted to engage with the drive means.

The male member may comprise a resilient protrusion which is resiliently biased  
15 towards a second disc magazine, but is constructed so as to be urged to engage with a female member of a first disc magazine, such that when the urging means is removed the male member is biased towards and engages with the second magazine.

A variety of medicaments may be administered by using the inhaler of the invention,  
20 such medicaments may have a systemic or non-systemic activity on the patient. Such medicaments are generally (but not limiting) antibiotics, bronchodilators or other anti-asthma drugs. Such medicaments include, but are not limited to  $\beta_2$ -agonists, e.g. fenoterol, formoterol, pirbuterol, reproterol, rimiterol, salbutamol, salmeterol and terbutaline; non-selective beta-stimulants such as isoprenaline; xanthine  
25 bronchodilators, e.g. theophylline, aminophylline and choline theophyllinate; anticholinergics, e.g. ipratropium bromide; mast cell stabilisers, e.g. sodium cromoglycate and ketotifen; bronchial anti-inflammatory agents, e.g. nedocromil sodium; and steroids, e.g. beclomethasone dipropionate, fluticasone, budesonide and flunisolide; and combinations thereof.

30

Specific combinations of medicaments which may be mentioned include combinations of steroids, such as, beclomethasone dipropionate, fluticasone, budesonide and flunisolide; and combinations of two  $\beta_2$ -agonists, such as, formoterol and salmeterol. It is also within the scope of this invention to include combinations of one or more of the aforementioned steroids with one or more of the

Further medicaments which may be mentioned include systemically active materials, such as, proteinaceous compounds and/or macromolecules, for example, hormones and mediators, such as insulin, human growth hormone, leuprolide and alpha interferon; growth factors, anticoagulants, immunomodulators, cytokines and nucleic acids.

When dual disc magazines are used the inhaler will be provided with two radially acting push rod mechanisms. These mechanisms may be adapted to operate together, independently or sequentially.

The invention will now be illustrated by way of example only and with reference to the accompanying drawings, in which:

20

Figure 1 is a cross-sectional view of a spool and spool carrier;

Figure 2 is a perspective view of a single disc magazine comprising spools;

Figure 3 is a schematic representation of the ejection of a spool from the spool carrier;

25

Figure 4 is a perspective view of a combination therapy disc magazine; and

Figure 5 is a cross-sectional view of the combination therapy mechanism.

Figure 6 is a perspective view of a disc magazine provided with an empty spool holder;

30

Figure 7 is a perspective view of a pair of disc magazines provided with a drive plate;



Figure 8 is a schematic representation of a pair of magazines provided with a drive plate;

Figure 9 is a schematic representation of the carousel in operation with dual plunger rods;

5 Figure 10 is a schematic representation of the device when the first (lower) carousel has completed a 360° rotation;

Figure 11 is a perspective view of an alternative embodiment of a drive disc;

Figure 12 is a perspective view of a pair of disc magazines with a drive disc;

Figure 13 is a schematic representation of a device in operation with a dual plunger rod; and

10 Figure 14 is a schematic representation of a device when the first (lower) carousel has completed a 360° rotation.

With reference to Figure 1. A single medicament dose unit (1) is comprised of a  
15 spool (2), a spool carrier (3) and a single dose of medicament (4), for use in a dry powder inhaler. The spool (2) comprises a longitudinal body (5) and terminal flanges (6 and 7) at each end. The sides (8 and 9) of the flanges (6 and 7) form a seal and a tight slidable fit with the inner walls (10 and 11) of the spool carrier (3). The length of the spool (2) and the length of the spool carrier (3) are substantially the same.  
20 Each flange is provided with an external face (12 and 13).

With reference to Figures 2 and 3. A plurality of spools (2) and carriers (3) are joined in a disc to form a magazine. The plurality of dose units (1) arranged radially around the circumference of the magazine (14). The inhalation device is provided  
25 with a dispensing mechanism (not shown) and a push rod (15) which also acts radially. The push rod (15) when actuated operates in the radial plane of the magazine (14) ejecting a spool (2) radially from the spool carrier (3) into the inhalation passage (not shown). The spool (2) remains in the plane of the magazine (14) and the flange (7) remains in co-operation with the spool carrier (3) so that it can  
30 move out of the inhalation passage upon rotation of the magazine (14).

With reference to Figures 4 and 5. A "double decker" arrangement is achieved by joining a first magazine (14) with a second magazine (16). The inhaler mechanism is provided with a first push rod (5) and a second push rod (17). The push rods may be actuated jointly, separately or sequentially optionally allowing medicament to be dispensed at the same time in the spool from the first magazine (14) as in the spool from the second magazine (16).

With reference to Figure 6, a spool carrier magazine (101) comprises a disc provided with a plurality of radially mounted spool carriers (102). Each of the spool carriers (102) (save for one) is provided with a spool (103). One of the spool carriers (104) is empty and is provided with a cut away portion (105).

With reference to Figure 7, a pair of spool carrier magazines (101a and 101b) are provided. A drive disc (106) comprises a substantially planar annular disc. The inner surface (107) of the drive disc (106) is provided with a plurality of teeth (108) which are adapted to engage with a drive means (not shown).

Adjacent to the periphery (109) of the drive disc (106), the disc is provided with an aperture (110) through which protrudes an out of plane resilient male member (111). The male member (111) is biased towards one of the magazines. By way of example only, the embodiment described is one in which the male member (111) is biased towards the uppermost magazine (101b), although it should be understood that the present application should be read to also encompass an embodiment in which the male member may be biased towards the other magazine (101a).

The drive disc (106) is positioned adjacent to the first magazine (101a) such that the male member (111) overlies the cut away portion (105) and the empty spool carrier (104). When the second magazine (101b) is positioned in place it is arranged such that a filled spool carrier (102) overlies the male member (111). The circumferential surface (112) rests against the male member (111) and urges it into an engaging position with the empty spool carrier (104).

Thus, in use, when the annular drive disc (106) is rotated, the male member (111) engages with the empty spool carrier (104) to rotate the first magazine (101a) whilst the second magazine (101b) is disengaged and therefore remains unmoved.

5

With reference to Figures 8-10, the assembly of the system is illustrated. Thus, the assembly (113) comprises a chassis (114) and the drive disc (106) is placed above the magazine (101a). The male member (111) is biased away from the magazine (101a) and therefore protrudes above the plane of the drive disc (106). The second upper  
10 magazine (101b) is then positioned above the drive disc (106).

The male member (111) comprises a substantially triangular shaped tab with a first surface (116), a second surface (117), a hinged end (118) and a distal end (119). Optionally, the hinged end (118) may be provided with a groove (119) to facilitate  
15 the flexible movement of the male member (111). In its free position the male member (111) rests such that the first surface (116) lies in the plane of the drive disc (106) and the second surface (117) lies out of the plane and protrudes from the drive disc (111).

20 When the second, upper magazine (101b) is in place, the lower, outer surface (120) of the spool carrier magazine is urged against the second surface (117) of the male member (111). This urges the second surface (117) to lie in the plane of the drive disc (106) and therefore the first surface (116) lies out of the plane, enabling it to engage with the empty spool carrier (104).

25

A push rod (121) is also provided which comprises a pair of spool prodders (122a and 122b). The push rod (121) is connected to an actuator means (not shown). A chassis lid (114a) is provided to close the system.

30 With reference to Figures 11 to 14, a further embodiment is illustrated in which the male member (111a) protrudes beyond the peripheral edge (123) of the drive disc

(106). The chassis (114a) is provided with two sets of guide rails (124 and 125). The device is assembled so that the male member (111a) is tensioned and the peripheral end (126) of the male member (111) held in the guide rail (124). When the lower magazine has rotated through approximately 360°, the male member (111a)  
5 reaches a break in the guide rails (124 and 125), thus allowing the male member (111a) to be urged towards the second magazine and into the second guide rail (125).

10

15

20

25

30

**CLAIMS**

1. A delivery device comprising a rotatable metering member adapted to dispense a measured amount of material, a material delivery passage and a material delivery orifice, and at least one actuator member adapted to move the metering member from a material retaining position to a material dispensing position characterised in that the actuator member moves in a substantially radial direction and actuates the metering member in a substantially radial direction.
2. A delivery device according to claim 1 characterised in that the device comprises a plurality of metering members adapted to dispense a measured amount of material, said metering members being held in a rotatable magazine.
3. A delivery device according to claim 2 characterised in that the device is adapted to take a plurality of magazines.
4. A delivery device comprising a plurality of rotatable magazines, each magazine being provided with a plurality of metering members adapted to dispense a measured amount of material, a material delivery passage and a material delivery orifice, and at least one push rod adapted to move a metering member from a material retaining position to a material dispensing position.
5. A delivery device according to claims 1 or 4 characterised in that the material is a medicament.
6. A delivery device according to claims 1 or 4 characterised in that the material is a dry powder.
7. A delivery device according to claims 2 or 4 characterised in that the magazine is substantially circular.

8. A delivery device according to claims 3 or 4 characterised in that the device comprises a pair of magazines.
- 5 9. A delivery device according to claim 8 characterised in that the device is provided with means for engaging a first magazine whilst disengaging a second magazine and which engaging means is moveable from an engaging to a disengaging position and vice-versa.
- 10 10. A delivery device according to claim 9 characterised in that the engaging means comprises male and female interlocking members.
11. A delivery device according to claim 10 characterised in that the magazine is provided with a female member and a drive means is provided with a male member.
- 15 12. A delivery device according to claim 11 characterised in that a drive plate is provided with a male member and is adapted to engage with the drive means.
- 20 13. A delivery device according to claim 12 characterised in that the male member comprises a resilient protrusion which is resiliently biased towards a second magazine, but is constructed so as to be urged to engage with a female member of a first disc magazine, such that when the urging means is removed the male member is biased towards and engages with the second magazine.
- 25 14. A delivery device according to claim 13 characterised in that the actuator means comprises at least two radially acting push rod mechanisms which may operate together, independently or sequentially.

15. A delivery device according to Claim 5 characterised in that the medicament metering member comprises a spool and a spool carrier wherein the void between the spool carrier is filled with medicament.
- 5 16. A delivery device according to Claim 15 characterised in that the device is provided with a pair of magazines and said pair of magazines contain the same medicament.
- 10 17. A delivery device according to Claim 15 characterised in that the device is provided with a pair of magazines and said pair of magazines contain different medicaments.
18. A delivery device according to claim 5 characterised in that the medicament delivery device is an inhaler
- 15 19. A delivery device according to claim 2 characterised in that the inhaler is a dry powder inhaler.
- 20 20. A dry powder inhaler comprising a metering member adapted to dispense a measured amount of medicament, an inhalation passage and a mouthpiece, and at least one push rod adapted to move the metering member from a medicament retaining position to a medicament dispensing position characterised in that the push rod moves in a essentially substantially radial direction and actuates the metering member in a substantially radial direction.
- 25 21. A dry powder inhaler comprising a plurality of metering members adapted to dispense a measured amount of medicament and held in a rotatable magazine, an inhalation passage and a mouthpiece, and at least one push rod adapted to move one of the plurality of metering members from a medicament retaining position to
- 30 a medicament dispensing position.

22. A dry powder inhaler according to Claim 17 characterised in that the medicaments are fluticasone and salmeterol.
23. A dry powder inhaler according to Claim 21 characterised in that the inhaler is  
5 provided with two push rods.
24. A magazine comprising a plurality of radially mounted and radially facing spools said spools containing a medicament in dry powder form.
- 10 25. A magazines according to claim 24 characterised in that the magazine is coupled to a second magazine and is provided with an intermediate drive disc.
26. A method of delivering a material which comprises using a delivery device according to Claim 1.  
15
27. A method of administering a dry powder medicament using a delivery device according to Claim 6.
28. A method according to claim 27 characterised in that a combination of  
20 medicaments are administered.
29. A method of treatment of a patient with a respiratory disorder comprising the administration of a therapeutically effective amount of a medicament using an inhaler according to claim 18.  
25
30. The use of salmeterol and/or fluticasone in the manufacture of an inhaler according to claims 1 or 2.
31. The use of salmeterol and/or fluticasone in the manufacture of a magazine  
30 according to claims 24 or 25.



32. A delivery device substantially as described with reference to the accompanying drawings.

5

1/10

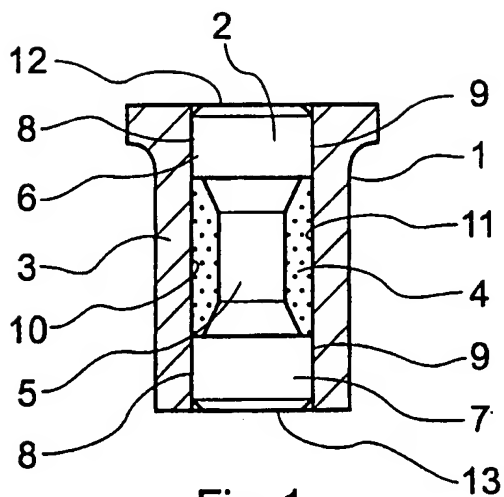


Fig. 1

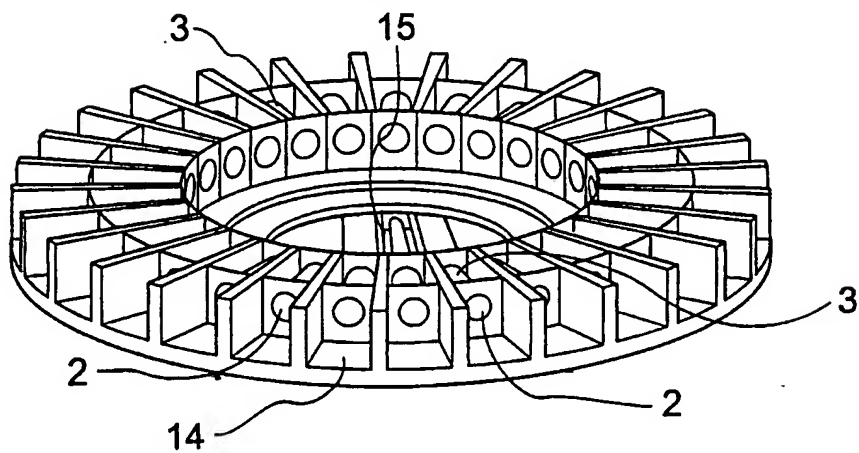


Fig. 2

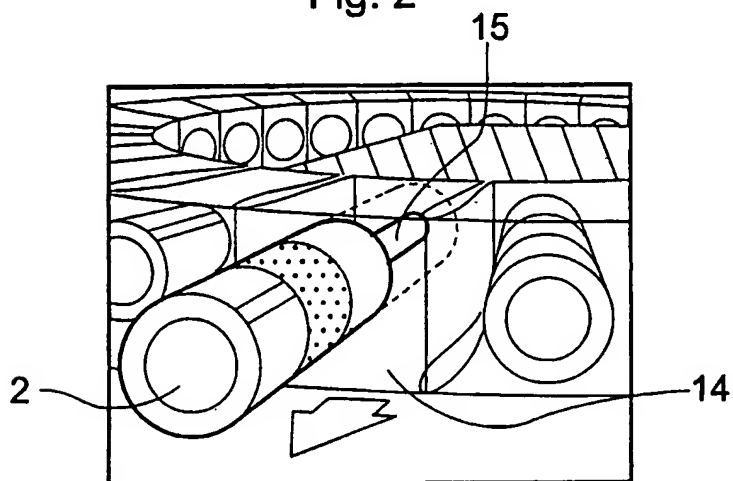


Fig. 3

2/10

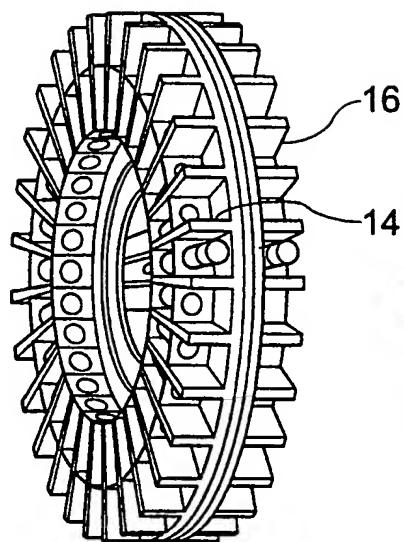


Fig. 4a

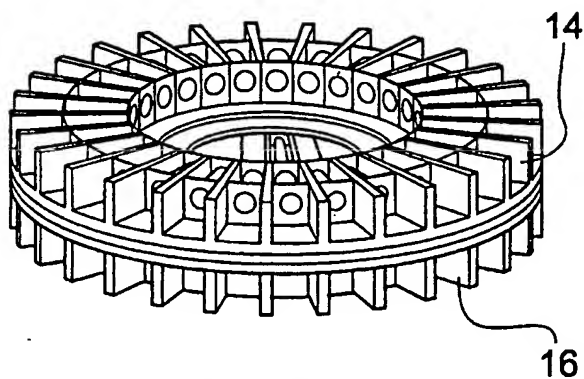


Fig. 4b

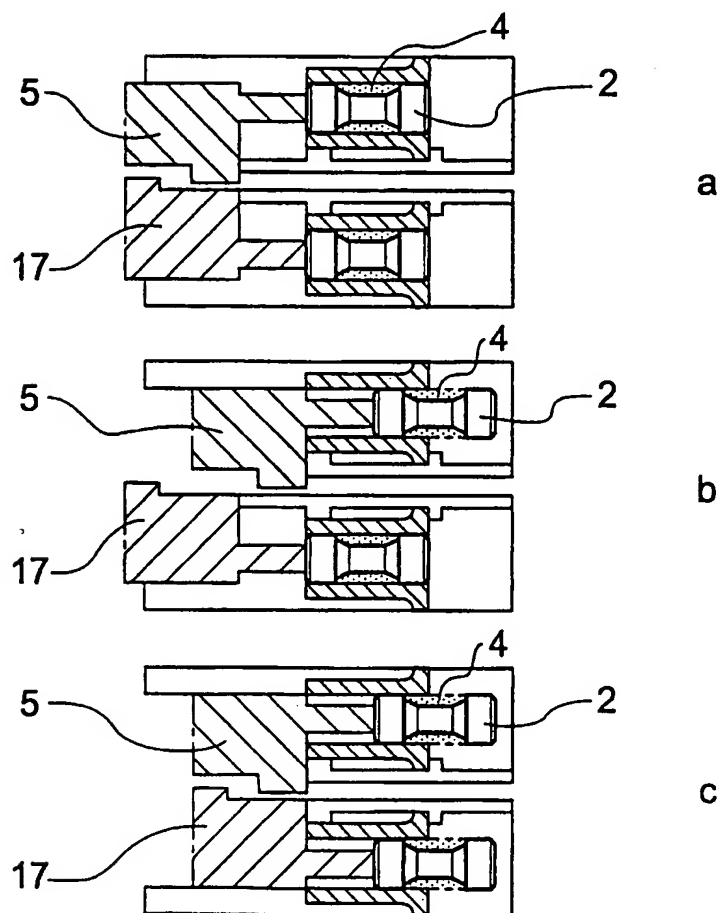


Fig. 5

3/10

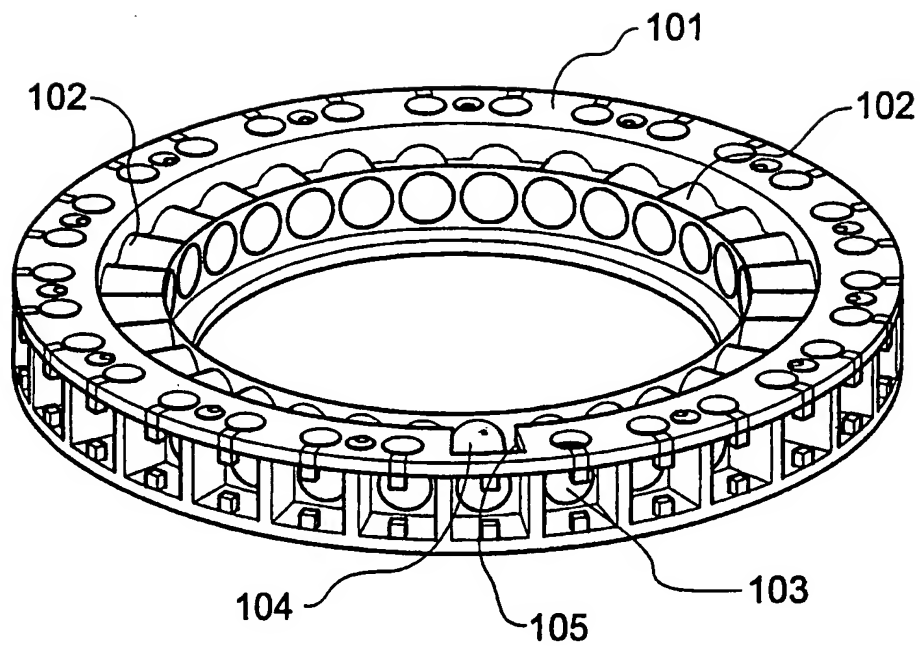


Fig. 6

4/10

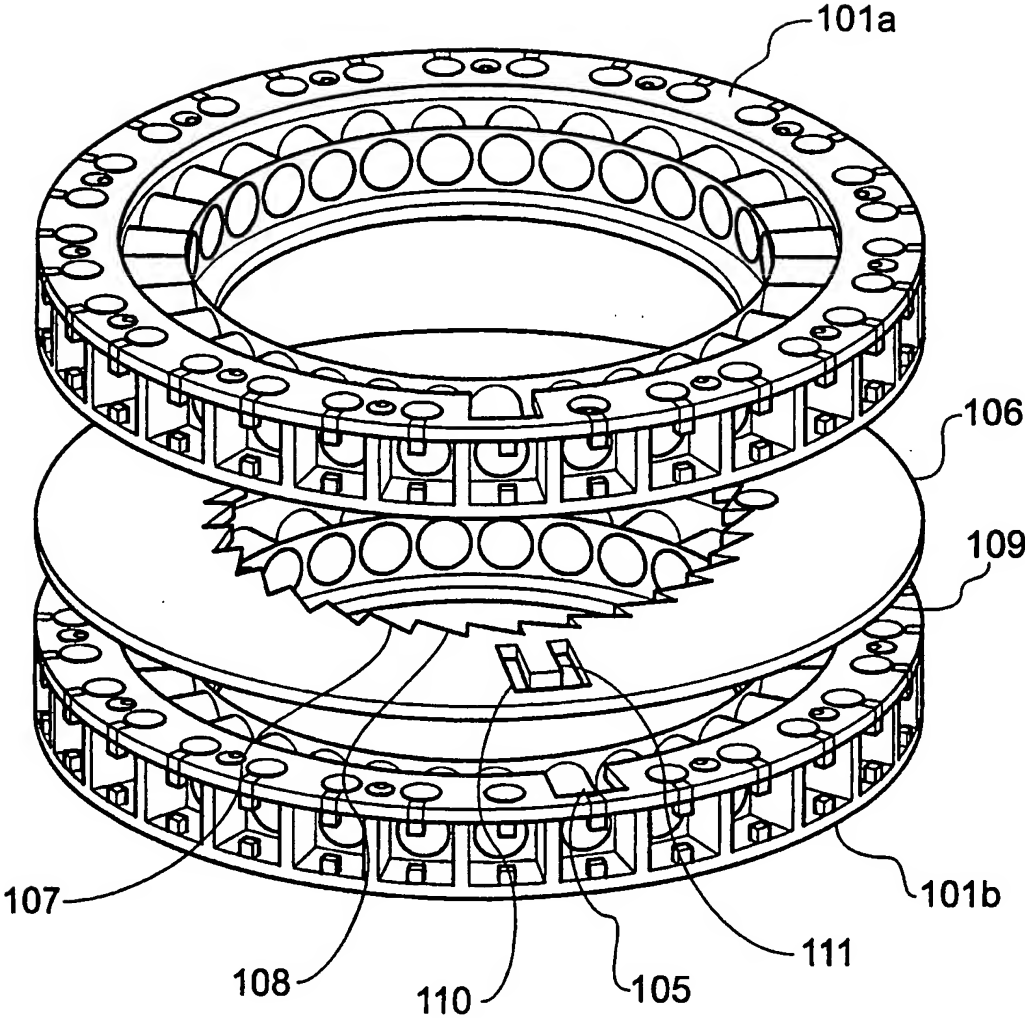


Fig. 7

5/10

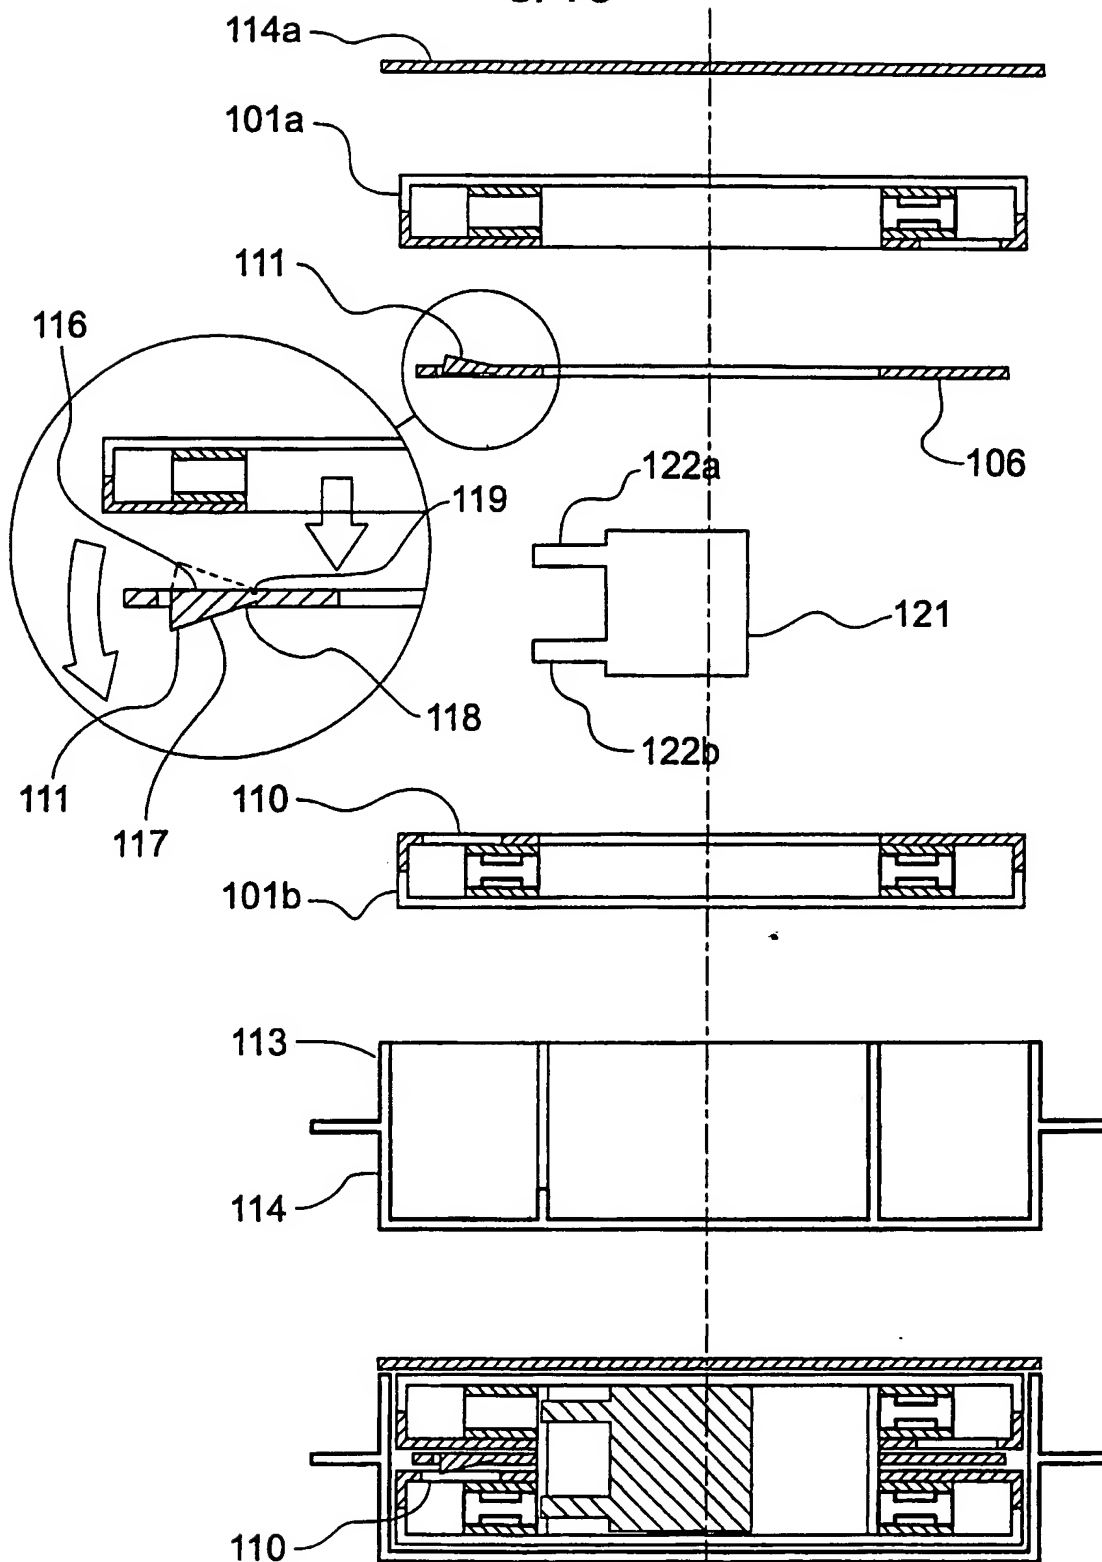


Fig. 8

6/10

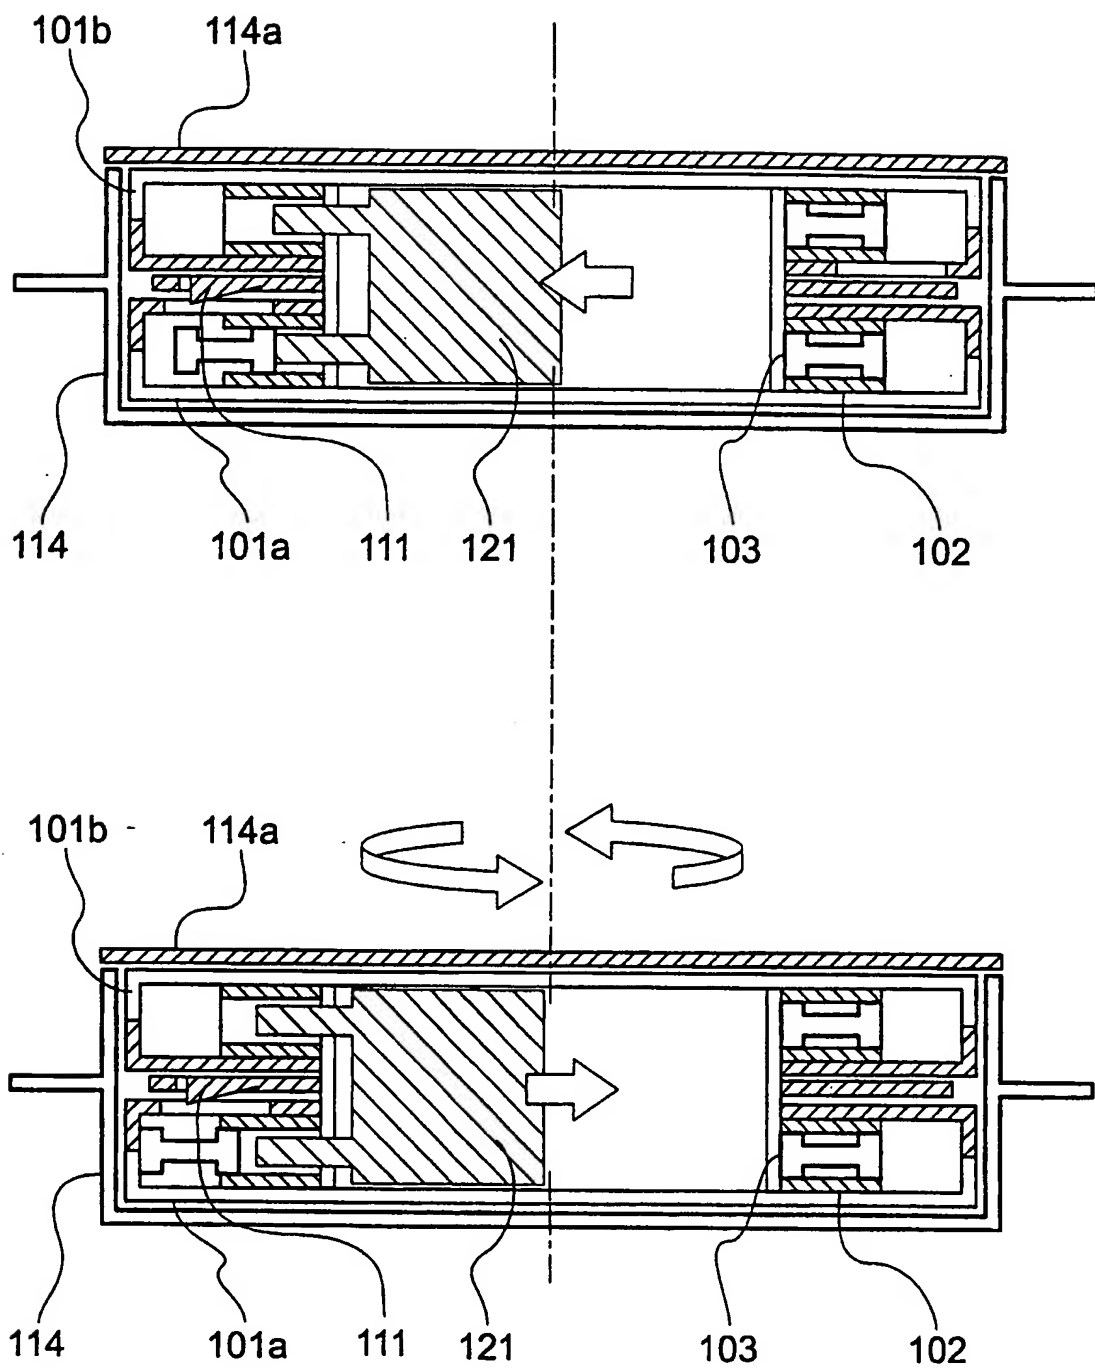


Fig.9

7/10

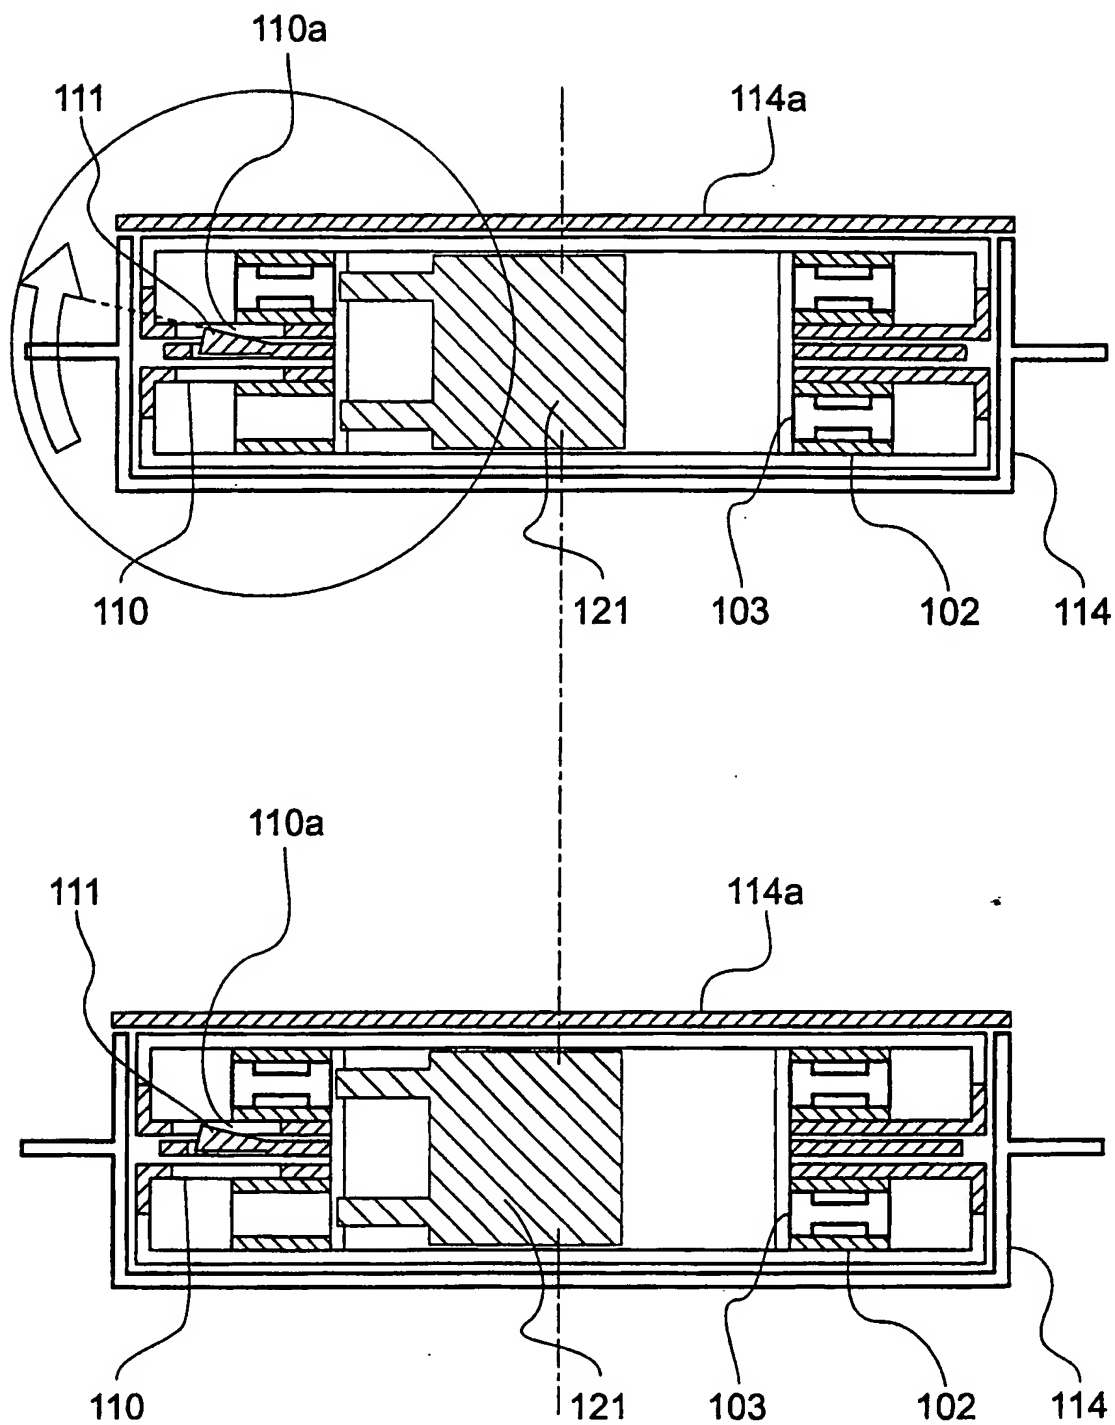


Fig.10



8/10

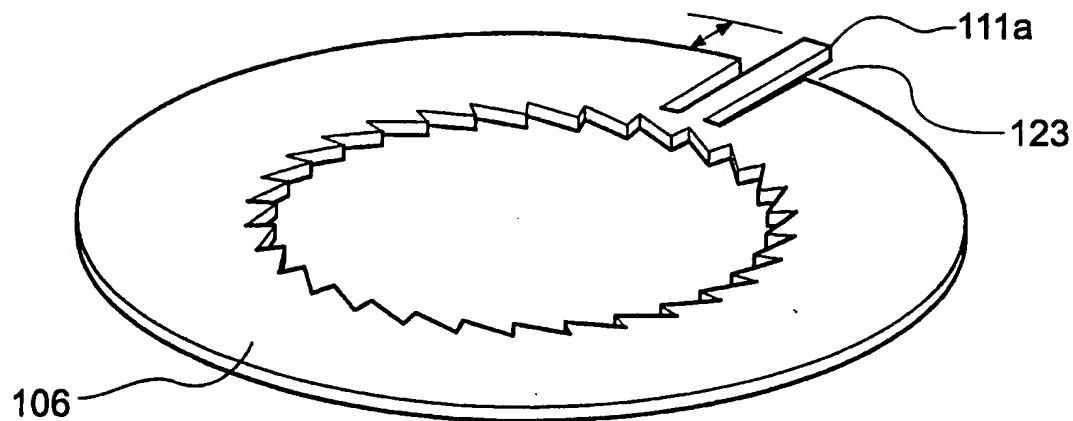


Fig. 11

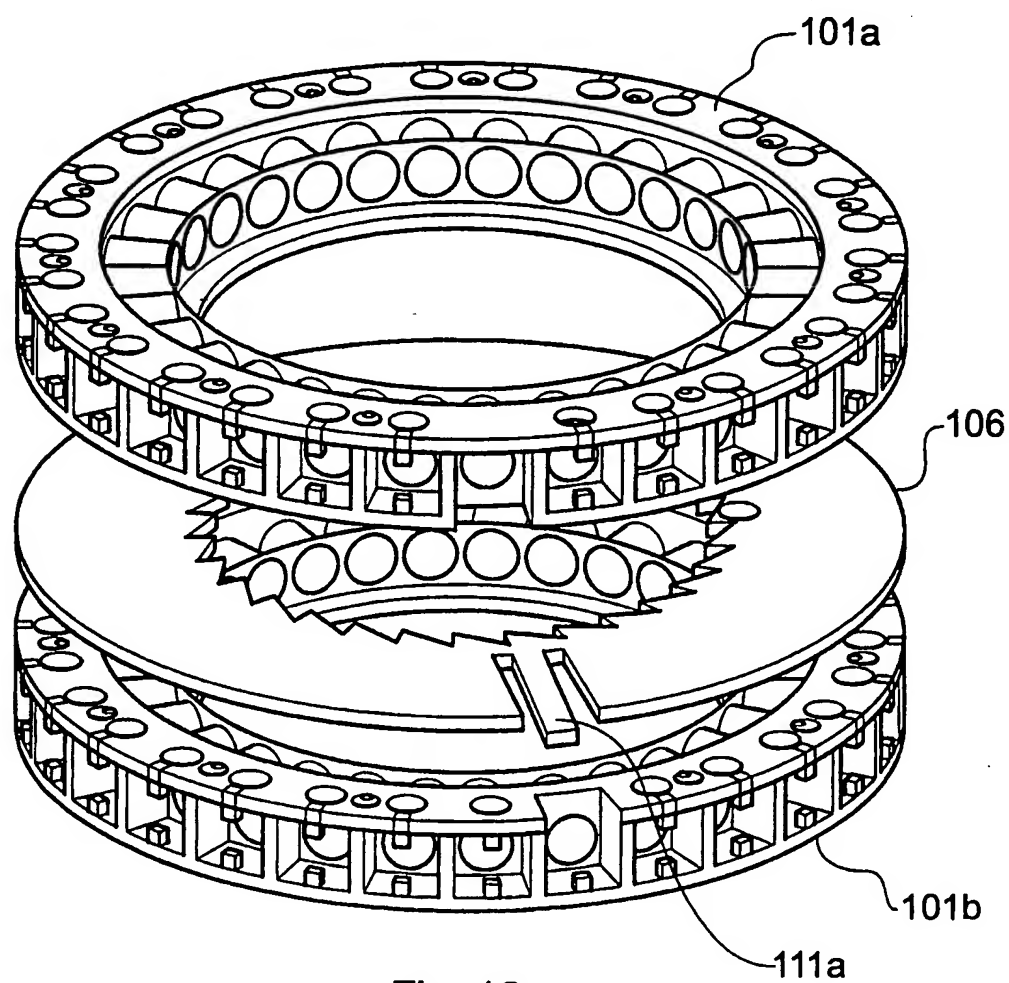


Fig. 12

9/10

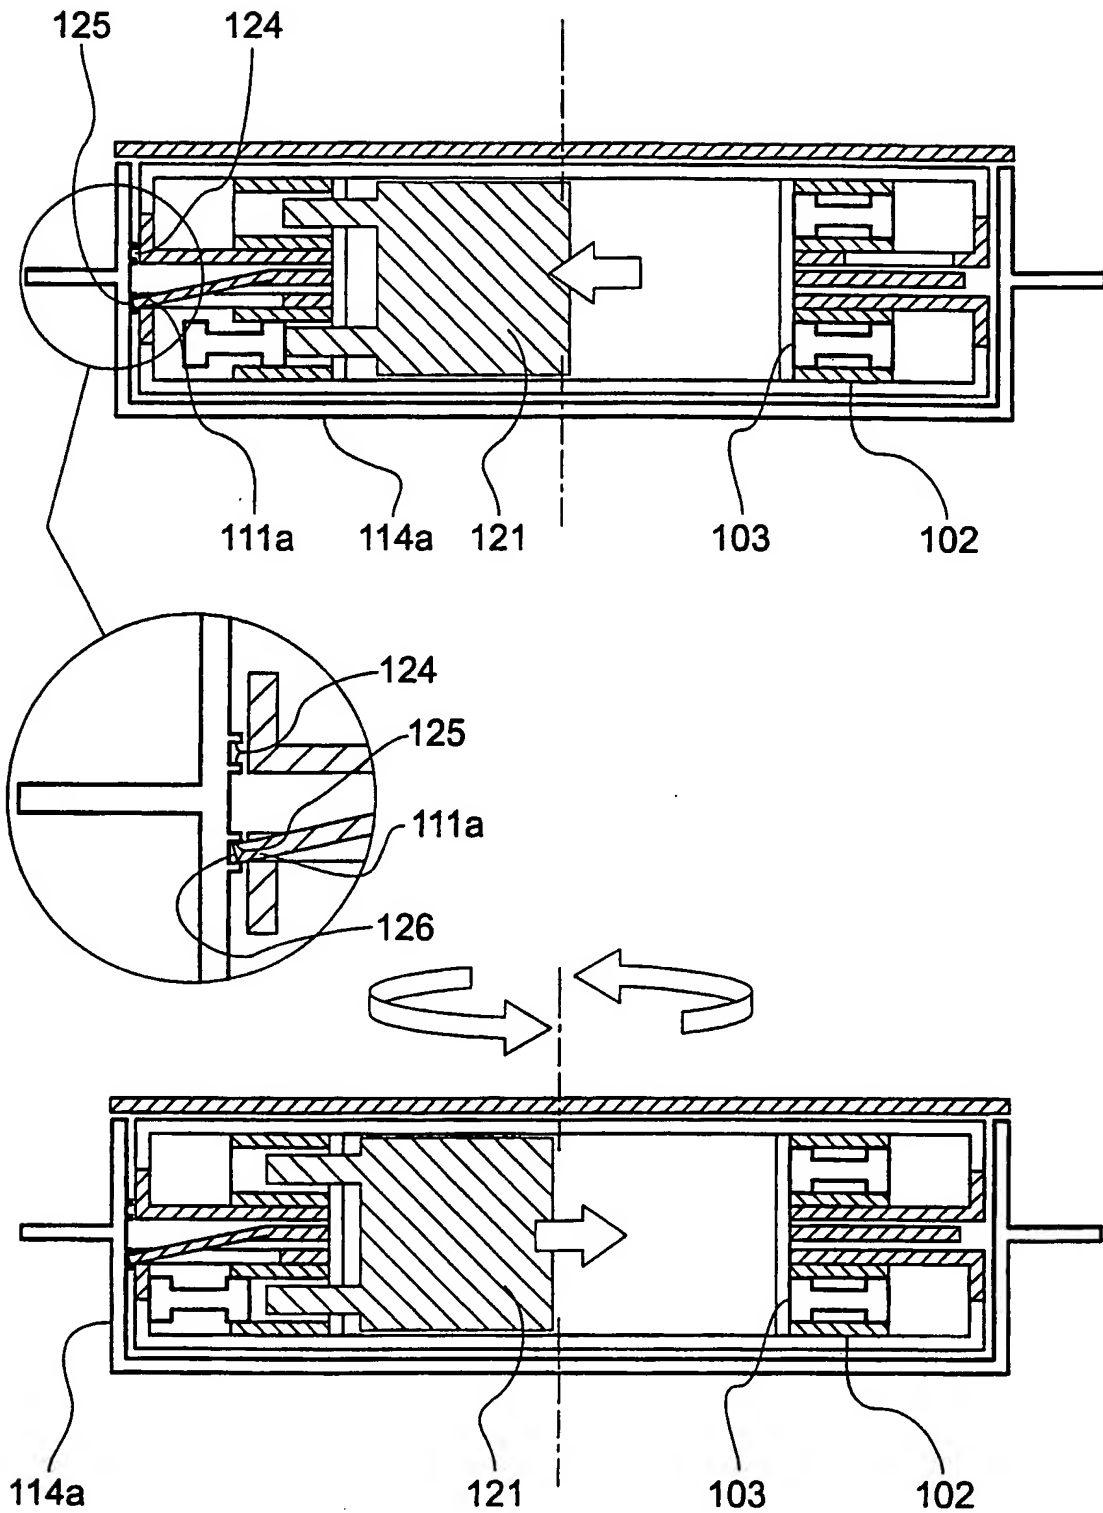


Fig.13

10/10

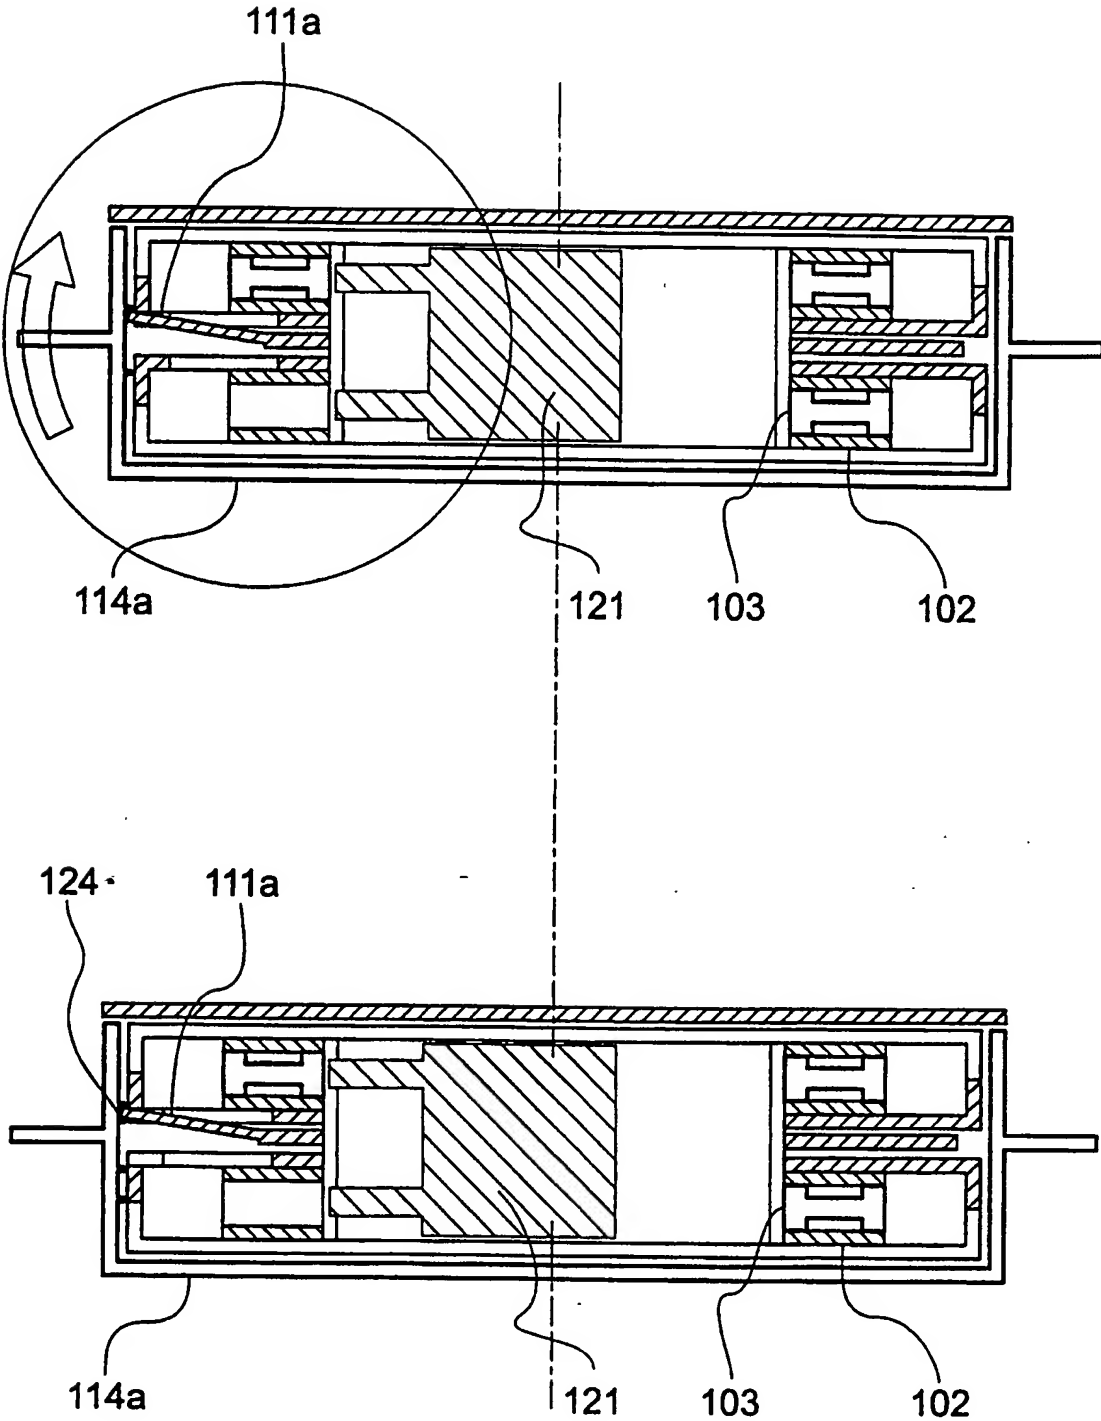


Fig.14

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/03377

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61M15/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 03175 A (FISONS PLC) 5 March 1992 (1992-03-05) claim 1; figures	1,2,4-7, 18-22,30 3,15
Y	---	---
Y	US 4 811 731 A (NEWELL ROBERT E ET AL) 14 March 1989 (1989-03-14) column 7, paragraph 2; figures 10-12	3
A	---	4
X	US 4 860 740 A (KIRK WILLIAM F ET AL) 29 August 1989 (1989-08-29) claims 1-4; figures	1,2,5-7, 18-22,30
Y	WO 93 16748 A (INNOVATA BIOMED LTD) 2 September 1993 (1993-09-02) cited in the application claims; figures	15,24,31
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

20 December 2000

Date of mailing of the international search report

05/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Villeneuve, J-M

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/03377

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 562 918 A (STIMPSON PHILIP G) 8 October 1996 (1996-10-08)	24, 31
A	abstract; figures 24-26 ---	1
A	US 5 301 666 A (LERK COENRAAD ET AL) 12 April 1994 (1994-04-12) claims 1,4-6; figures ---	8-12
A	US 5 415 162 A (BOUNDY MARYANNE G ET AL) 16 May 1995 (1995-05-16) ---	
X	US 5 896 855 A (COOK ROBERT S ET AL) 27 April 1999 (1999-04-27) claims 13-20 -----	1,2,5-7, 18-22,30

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 32

P.C.T. Rule 6.2 (a)

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-3, 5-19, 20, 22, 30

Delivery device with radial actuator

2. Claims: 4-18, 21-23

Delivery device with a plurality of magazines

3. Claims: 24, 25, 31

A magazine comprising spools

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03377

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9203175	A	05-03-1992	NONE	
US 4811731	A	14-03-1989	AT 396872 B	27-12-1993
			AT 204086 A	15-05-1993
			AU 591152 B	30-11-1989
			AU 6065586 A	12-02-1987
			BE 905189 A	29-01-1987
			BR 8603576 A	04-03-1987
			CA 1272917 A	21-08-1990
			CH 672600 A	15-12-1989
			CY 1481 A	08-12-1989
			DE 3625685 A	12-03-1987
			DE 3682457 A	19-12-1991
			DK 360986 A, B,	31-01-1987
			EP 0211595 A	25-02-1987
			ES 2000781 A	16-03-1988
			FI 863094 A, B,	31-01-1987
			FR 2585563 A	06-02-1987
			GB 2178965 A, B	25-02-1987
			GR 861995 A	04-11-1986
			HK 67589 A	01-09-1989
			HU 44182 A, B	29-02-1988
			IE 59026 B	15-12-1993
			IL 79550 A	10-06-1991
			IT 1195984 B	03-11-1988
			JP 1871546 C	06-09-1994
			JP 62041668 A	23-02-1987
			JP 5077433 B	26-10-1993
			KE 3865 A	19-05-1989
			KR 9402247 B	19-03-1994
			LU 86534 A	03-09-1987
			MX 171389 B	22-10-1993
			NL 8601949 A	16-02-1987
			NO 863062 A, B,	02-02-1987
			NZ 217006 A	26-04-1989
			PH 26882 A	16-11-1992
			PT 83094 A, B	26-01-1987
			SE 8603252 A	31-01-1987
			SG 8789 G	07-07-1989
			US 5035237 A	30-07-1991
			ZA 8605655 A	27-05-1987
US 4860740	A	29-08-1989	AR 226386 A	30-06-1982
			AU 554502 B	21-08-1986
			AU 7893381 A	21-05-1982
			BE 890937 A	30-04-1982
			BR 8108856 A	21-09-1982
			CA 1169322 A	19-06-1984
			DE 3174779 D	10-07-1986
			DK 293882 A, B,	30-06-1982
			EP 0063599 A	03-11-1982
			ES 506585 D	01-09-1982
			ES 8206980 A	01-12-1982
			FI 76258 B	30-06-1988
			GR 75358 A	13-07-1984
			IE 52783 B	02-03-1988
			IT 1140010 B	24-09-1986
			JP 2037188 B	22-08-1990



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03377

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4860740 A		JP 57501815 T	14-10-1982
		MX 157953 A	28-12-1988
		NO 822300 A,B,	30-06-1982
		NZ 198822 A	30-04-1985
		PT 73899 A,B	01-11-1981
		WO 8201470 A	13-05-1982
		ZA 8107513 A	25-05-1983
WO 9316748 A	02-09-1993	AT 191649 T	15-04-2000
		AU 3508793 A	13-09-1993
		BR 9305942 A	21-10-1997
		CA 2130477 A	02-09-1993
		CN 1082191 A,B	16-02-1994
		CN 1234280 A	10-11-1999
		DE 69328358 D	18-05-2000
		DE 69328358 T	07-12-2000
		EP 0626869 A	07-12-1994
		EP 0928618 A	14-07-1999
		ES 2145770 T	16-07-2000
		FI 943813 A	19-08-1994
		GB 2278596 A,B	07-12-1994
		GB 2292557 A,B	28-02-1996
		GR 3033790 T	31-10-2000
		JP 7506981 T	03-08-1995
		MX 9300908 A	01-11-1993
		NO 943065 A	12-10-1994
		NZ 249192 A	29-01-1997
		NZ 299262 A	29-01-1997
		PT 626869 T	31-10-2000
		US 5778873 A	14-07-1998
		US 5924417 A	20-07-1999
		ZA 9301171 A	14-02-1994
US 5562918 A	08-10-1996	GB 2270293 A	09-03-1994
		DE 69318027 D	20-05-1998
		DE 69318027 T	13-08-1998
		EP 0659094 A	28-06-1995
		WO 9405358 A	17-03-1994
		JP 8500750 T	30-01-1996
US 5301666 A	12-04-1994	DE 4211475 A	17-06-1993
		AT 139453 T	15-07-1996
		BR 9204987 A	15-06-1993
		CA 2084832 A	15-06-1993
		CN 1074381 A	21-07-1993
		DE 59206614 D	25-07-1996
		EP 0547429 A	23-06-1993
		HU 214757 B	28-05-1998
		IL 103908 A	16-10-1996
		JP 5245201 A	24-09-1993
		KR 218816 B	01-10-1999
		ZA 9209232 A	26-05-1993
US 5415162 A	16-05-1995	NONE	
US 5896855 A	27-04-1999	AT 163553 T	15-03-1998
		AU 5710294 A	19-07-1994
		CA 2152168 A	07-07-1994

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03377

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5896855 A		DE 69317302 D	09-04-1998
		DE 69317302 T	20-08-1998
		DK 675742 T	28-09-1998
		EP 0675742 A	11-10-1995
		EP 0806214 A	12-11-1997
		ES 2115923 T	01-07-1998
		WO 9414491 A	07-07-1994
		GR 3026661 T	31-07-1998
		JP 8504634 T	21-05-1996
		MX 9400086 A	29-07-1994
		ZA 9309705 A	29-08-1994

---

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**